



WEIGHT

.97g/cm (.087 oz/in)

RECOMMENDED TORQUE

17.7 N-cm (25 in-oz)

MATERIALS AND FINISH

HOUSING

Material:

.025-in. (.64-mm) thick Beryllium Copper per QQ-C- 533 or .024-in. (.61-mm) thick Cold Rolled Steel per ASTM A-366

Finish:

See finish table on opposite page

CAM

Material:

Beryllium Copper per QQ-C-533

Finish:

See finish table on opposite page




SCREW

Material:

Stainless steel

Finish:

Passivated

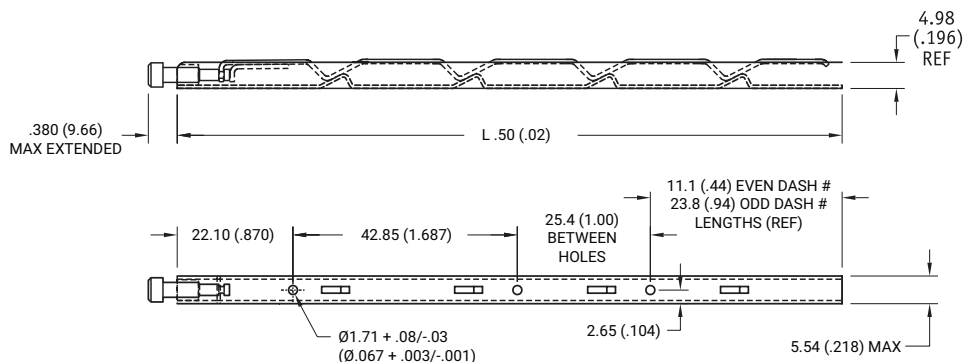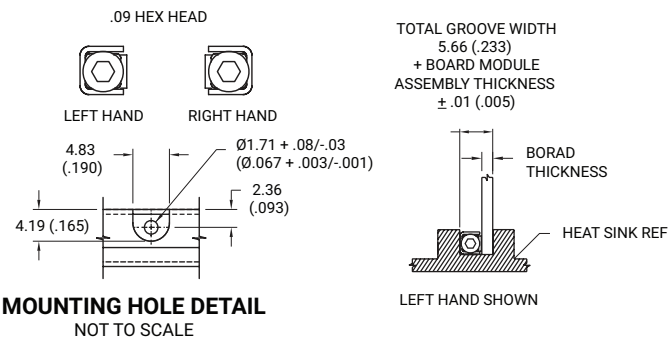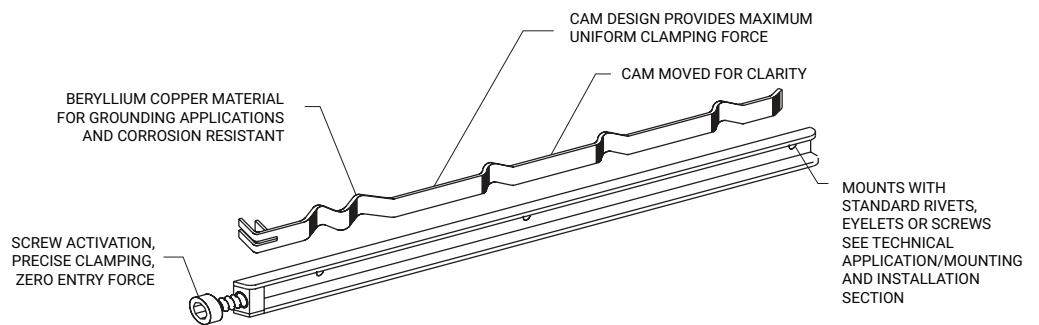

MATERIALS TABLE

CODE	
B	BERYLLIUM COPPER, 1/4H PER ASTM-B-194
S	STEEL PER ASTM-A-366

FINISH TABLE

CODE	
-1	NONE
-3	CADMIUM PER QQ-P-416, TYPE 2, CLASS 2
-5	GOLD PLATE PER MIL-G-45204, TYOE 1, GLASS 1
-6	NICKEL PLATE PER QQ-N-290, CLASS 1, GRADE G, BRIGHT
-7	ZINC PLATE CLEAR CHROMATE, PER ASTM-B-633, Fe/Zn 8
-8	ZINC PLATE YELLOW CHROMATE, PER ASTM-B-633, Fe/Zn 8
NOTE:	NO FINISH (-1) NOT AVAILABLE WITH "S" STEEL MATERIAL

Part Number Code		29 B - 10 - 5
Housing Material Beryllium Copper _____ or select from Materials Table	B	
Length Length in 12.7(.50) increments _____ 6 [76.2(3.00)] _____ to 24 [304.8(12.00)]		
Finish Gold Plate _____ or select from Finish Table		5

Part Number Code example: 29B-12-6

Series 29 Screw-actuated LOK-TAINER, Beryllium
Copper housing, 152.4-mm. (6.00-in.) long, nickel
plate finish

